



Disabled Toilet Alarms

An extensive range of disabled toilet alarm systems, designed to meet the requirements of BS8300 2001. These products can be supplied as handy complete packs or as component parts to enable bespoke systems to be produced.

All units are manufactured in our ISO9000:2000 factory from robust sheet steel and are finished in a high quality white stove enamel. The economy kits include a controller, pull-cord and self-adhesive label and standard kits also consist of economy kit products with the addition of a door beacon/sounder and remote reset point.

Systems can operate during mains power failure with the addition of a rechargeable 9 Volt battery.

Features

- Controller incorporates a 230V power supply, 75dBA sounder, twin alarm indicators and a reset button
- Pull-cord units incorporate a twin LED indicator for 360° viewing, with 2 pull toggles
- Door beacon/sounder houses a 20mm long life LED and a 75dB sounder
- Remote control reset points incorporate a reset switch, 75dBA sounder & LED indicator
- All units are manufactured in robust sheet steel and are available in white finish
- Units fit onto standard 35mm back boxes or pattress boxes
- Optional 9 Volt rechargeable back up battery is available to enable the system to operate during mains power failure


Kit Contents

Economy Kit

- 1 x Controller
- 1 x Pull-cord
- 1 x Self-Adhesive Label

Standard Kit

- 1 x Controller
- 1 x Pull-cord
- 1 x Self-Adhesive Label
- 1 x Door Beacon/Sounder
- 1 x Remote Reset Point

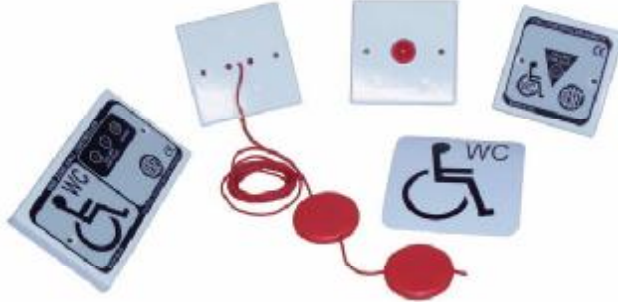

FPA-1000/WH



FPA-1001/WH



FPA-1002/WH



FPA-1003/WH



FPA-1004

Disabled Toilet Alarm Kit Ordering Codes & Information

Cat No	Description
FPA-078/WH	White Economy Disabled Toilet Alarm Kit
FPA-079/WH	White Standard Disabled Toilet Alarm Kit

Disabled Toilet Alarm Component Ordering Codes & Information

Cat No	Description
FPA-1000/WH	White Controller
FPA-1001/WH	White Pull-cord
FPA-1002/WH	White Door Beacon/Sounder
FPA-1003/WH	White Remote Reset Point
FPA-1004	Self-Adhesive Label
FPA-1007	9 Volt Rechargeable Battery

Dimensions

Controller

149mm x 85mm x 12mm (47mm Surface)

Pull-Cord Switch

90mm x 34mm

Door Beacon/Sounder

85mm x 85mm x 20mm (35mm Surface)

Remote Reset Point

85mm x 85mm x 12mm (47mm Surface)